


Rated Load(t)	A	B	C	D	E	F	G	H	K
20	56	31.8	105.6	150	82.6	76	48	M12	10
25	58	38	147	150	117	100	38	M20	14
30	58	38	147	150	117	100	38	M12	10
40	58	38	147	150	117	100	38	M20	14
50,60	88	58	167	200	127	107	58	M20	14
70	88	58	182	250	142	125	58	M20	14
100	98	70	234	300	184	165	70	M20	20
150	98	70	234	300	184	165	78	M20	20
200	129	100	340	500	250	223	112	M24	36
300、400	140	108	360	500	250	223	112	M24	36
500	160	115	380	500	300	223	120	M24	36

额定载荷 Rated load	20、25、30、40、50、60、70、100 150、200、300、400、500t
精度等级 Accuracy class	±0.05(20°100t);0.1(150°500t)
灵敏度 Sensitivity	2.0±0.003mV/V
线性误差 Non-linearity	±0.05(10°100t);0.1(150°500t)
滞后误差 Hysteresis error	±0.03%F.S
蠕变(30分钟) Creep(30min)	±0.03%F.S
零点温度影响 TC ZERO	±0.03%F.S/10℃
灵敏度温度影响 TC SPAN	±0.03%F.S/10℃
输入阻抗 Input resistance	400±20Ω
输出阻抗 Output resistance	352±3Ω
绝缘电阻 Insulation resistance	≥5000 MΩ
额定温度 Nominal Temp Range	-10°+40℃
工作温度范围 Service Temp Range	-30°+70℃
安全负载 Safe load limit	150%F.S
破坏负载 Breaking load	200%F.S
额定激励电压 Nominal of range excitation	10~12 V DC
密封等级 Protection Class	IP67
材料 Material	合金钢 Alloy Steel 不锈钢 Stainless steel
电缆 Cable	Length:8m(10t); 12m(20t); 14m(25~40t);16m(50~150t) 20m(200~500t)

接线图 Wiring Schematic Diagram

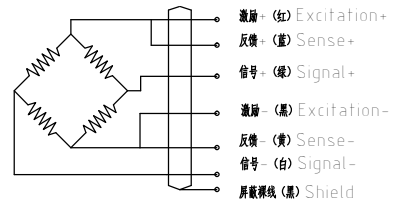

										宁波柯力传感科技股份有限公司
										ZSE-A20t~500t
										ZSE-ASS20t~500t